



HIMOINSA®
THE ENERGY



Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO



E10



WATER-COOLED



THREE PHASE



50 HZ



STG.2 (FLEXIBLE SCHEME)



DIESEL

Generating Rates



SERVICE		PRP	STANDBY
Power	kVA	200	220
Power	kW	160	176
Rated Speed	r.p.m.	1.500	
Standard Voltage	V	400	
Available Voltages	V	400/230 - 230/132 - 230 V	
Rated at power factor	Cos Phi	0,8	



QR Code

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2006/95/EC Low voltage.
- 2004/108/CE Electromagnetic compatibility.
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2002/88/EC & 2004/26/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference: 1000 mbar, 25°C, 30% relative humidity. Power according to ISO 3046 normative.

P.R.P. Prime Power - ISO 8528:

Prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during a 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

Standby Power (ISO 3046 Fuel Stop power):

Power available for use at variable loads for limited annual time (500h), within the following limits of maximum operating time: 100% load 25h per year – 90% load 200h per year. No overload available. Applicable in case of failure of the main in areas of reliable electrical network.

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 info@himoinsa.com www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA

Subsidiaries:

ITALY | PORTUGAL | POLAND | GERMANY | SINGAPORE | UAE | MEXICO | PANAMÁ | ARGENTINA



Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail:info@himoinsa.com | www.himoinsa.com





HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Engine Specifications 1.500 r.p.m.

ENGINE		PRP	STANDBY
Rated Output	Kw	175	193
Manufacturer		FPT_IVECO	
Model		NEF67 TE 2A	
Engine Type		Diesel 4 strokes-cycle	
Injection Type		Direct. Common rail	
Aspiration Type		Turbocharged and aftercooled	
Cylinders Arrangement		6 - L	
Bore and Stroke	mm	104x132	
Displacement	L	6,7	
Cooling System		Liquid (water + 50% Paraflu11)	
Lube Oil Specifications		ACEA E3 - E5	
Compression Ratio		17,5 : 1	
Fuel Consumption Stand By	l/h	48	
Fuel Consumption 100% PRP	l/h	44	
Fuel Consumption 80 % PRP	l/h	35,7	
Fuel Consumption 50 % PRP	l/h	25,6	
Lube Oil Consumption Full Load		0,5 % of fuel consumption	
Total oil capacity including tubes, filters	L	17	
Total Coolant Capacity	L	25,5	
Governor	Type	Electrical	
Air Filter	Type	Dry	
Inner diameter exhaust pipe	mm	70	



HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Generator

Generator		
Poles	Num	4
Winding Conections (standard)		Star-serie
Frame Mounting		S-3 11"1/2
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		self-excited, brushless
Voltage Regulator		A.V.R. (Electronic)
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standar (Vacuum impregnation)



HIMOINSA®
THE ENERGY


Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Control Panel Models

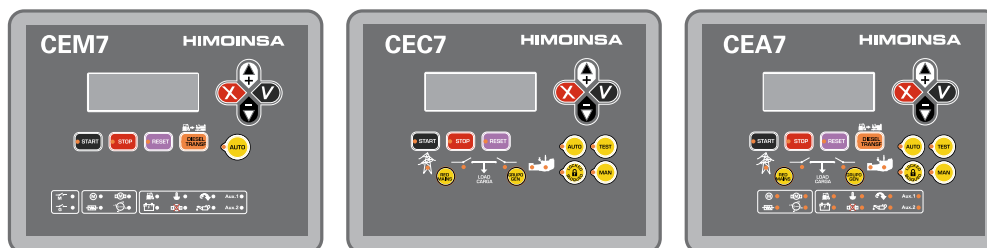

CEM7

CEC7

CEA7

FUNCTIONALITY	PANEL MODEL	CONTROLLER MODE
Auto-start	M5	CEM7
Automatic Control Panel Without Mains Control	AS5	CEM7**
Automatic Control Panel With Mains Control (customer change over contactors)	AS5	CEA7
Automatic Control Panel With Mains Control (Himoinsa change over contactor with display)	AS5XCC2	CEM7+CEC7
Automatic Mains Failure (wall mounted panel)	AC5	CEA7

(**) Pre-heating resistance in the Genset and Battery charger in the control panel included.

Option available: Auto-start control panel without circuit breaker

General Description

CEM 7

The CEM7 controller unit is a device able to control de operation, monitoring and protection of a generating set. The controller unit consists of 2 different modules:

- 1.The VISUALIZATION module
- 2.The MEASUREMENTS module

VISUALIZATION MODULE

Provides information about the status of the device and, at the same time, allows the user to interact with it. It consists on a backlit display and various LEDs for monitoring the status of the controller and buttons that allow the user to control, program and configure the functions of the unit.

MEASUREMENTS MODULE

Controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.

The connexion between the visualization module and the measurements module is made with a CAN communication bus. This feature allows the intercommunication of other modules to the main controller with a scalability warranty.

CEC 7

The CEC7 controller unit is a net sings supervision equipment, and control and supply supplier through generating set. The controller unit consists of 2 different modules:

- 1.The VISUALIZATION module
- 2.The MEASUREMENTS module

VISUALIZATION MODULE

The visualization module provides information about the status of the device and, at the same time, allows the user to interact with it. With this visualization module the user is able to control, program and configure the functions of the unit. It consists on a backlit display and various LEDs for monitoring the status of the controller and buttons that allow the user to control, program and configure the functions of the unit.

MEASUREMENTS MODULE

The measurements module controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.

The connection between the measure module and visualization mode is made by means of a CAN BUS (Communication Bus). This produces an interconnection between additional modules which guarantees the proper working of the controller.

CEA 7

CEA7 controller is a supervision equipment for mains signal and also a supervision and electrical supply through the genset. This controller is composed by 2 different modules:

- 1.VISUALIZATION module
- 2.MEASUREMENTS module

VISUALIZATION MODULE

The visualization module provides information about the status of the device and, at the same time, allows the user to interact with it. With this visualization module the user is able to control, program and configure the functions of the unit.

MEASUREMENTS MODULE

The measurements module controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.

Connection between the measure module and visualization mode is made by means of a CAN BUS (Communication Bus). This produces an interconnection between additional modules which guarantees the proper working of the controller.





HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Control & Power Panel

1. CM Control Panel.
2. CP Power Panel.
3. On/Off Switch..
4. Emergency Stop.
5. Main Line Circuit Breaker for overload protection.
6. Main bus /hardwire connection panel with safety protection.

CE-7 Auto-start multilingual control panel

- | | |
|--|---|
| 1. Voltage between each Phase & Neutral | 8. Fuel level |
| 2. Voltage between Phases | 9. Oil pressure, coolant temperature, oil temperature |
| 3. Current (amps) on each Phase | 10. Battery voltage, battery charging alternator voltage |
| 4. Frequency | 11. Engine Speed |
| 5. Active, Aparent & Reactive Power | 12. Hours running |
| 6. Power Factor | 13. Multilingual (Spanish, English, French, Italian, Portuguese, Polish, German, Chinesse, Russian, Swedish, Norwegian) |
| 7. Instant Power (KwH) and Accumulative power) | |

Engine Alarms

1. High coolant temperature.
2. Low oil pressure.
3. Battery charge alternator
4. Start failure.
5. Low water level.
6. Fuel storage.
7. Overspeed.
8. Underspeed.
9. Low battery voltage.
10. High coolant temperature by sensor.
11. Low oil pressure by sensor.
12. Low fuel level by sensor.
13. Unexpected shutdown.
14. Stop failure.
15. Low engine temperature.
16. Genset voltage drops.
17. Emergency stop.

Genset Alarms

1. Over-load
2. Unbalanced voltage
3. Over voltage
4. Under voltage
5. Over frequency
6. Under frequency
7. Over load
8. Short-circuit
9. Inverse Power
10. Asymmetry among phases
11. Genset contactor Failure

Mains Alarms

1. Maximum Mains Voltage.
2. Minimum Mains Voltage.
3. Maximum Mains Frequency.
4. Minimum Mains Frequency.
5. Mains phase sequence failure.
6. Mains power failure.
7. Mains contactor switching failure.

Programmable Alarms:
There are 5 programmable alarms on text and action that could be associated to any engine alarms and showed on the auxiliary led 1 and 2 of the display





Controllers Features

	CEM 7	CEC 7	CEA 7	CEM7 + CEC7
 GENERATOR READINGS				
Voltage among phases	•	•	•	•
Voltage among phases and neutral	•	•	•	•
Amperage	•	•	•	•
Frequency	•	•	•	•
Apparent power (kVA)	•	•	•	•
Active power (kW)	•	•	•	•
Reactive power (kVAr)	•	•	•	•
Power factor	•	•	•	•
 MAINS READINGS				
Voltage among phases	x	•	•	•
Voltage among phase and neutral	x	•	•	•
Amperage	x	•	•	•
Frequency	x	•	•	•
Apparent power	x	X	•	•
Active power	x	X	•	•
Reactive power	x	X	•	•
Power factor	x	X	•	•
 ENGINE READINGS				
Coolant temperature	•	X	•	•
Oil pressure	•	X	•	•
Fuel level (%)	•	X	•	•
Battery voltage	•	X	•	•
R.P.M.	•	X	•	•
Battery charge alternator voltage	•	X	•	•
 ENGINE PROTECTIONS				
High water temperature	•	X	•	•
High coolant temperature by sensor	•	X	•	•
Low engine temperature by sensor	•	X	•	•
Low oil pressure	•	X	•	•
Low oil pressure by sensor	•	X	•	•
Low coolant level	•	X	•	•
Unexpected shutdown	•	X	•	•
Fuel storage	•	X	•	•
Fuel storage by sensor	•	X	•	•
Stop failure	•	X	•	•
Battery voltage failure	•	X	•	•
Battery charge alternator failure	•	X	•	•
Overspeed	•	X	•	•
Underspeed	•	X	•	•
Start failure	•	X	•	•
Emergency Stop	•	•	•	•
 ALTERNATOR PROTECTIONS				
High frequency	•	•	•	•
Low frequency	•	•	•	•
High voltage	•	•	•	•
Low voltage	•	•	•	•
Short-circuit	•	X	•	•
Asymmetry among phases	•	•	•	•
Incorrect phase sequence	•	•	•	•
Inverse power	•	X	•	•
Overload	•	X	•	•
Genset signal droop	•	•	•	•

- Standard
- x Not included
- Optional

NOTE: All protections are programmable to make "warning" or "stop with cooling time" or "without"



HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Controllers Features

	CEM 7	CEC 7	CEA 7	CEM7 + CEC7
 COUNTERS				
Total hour counter	*	*	*	*
Partial hour counter	*	*	*	*
Kilowattmeter	*	*	*	*
Starts valid counters	*	*	*	*
Starts failure counters	*	*	*	*
Maintenance	*	*	*	*
 COMMUNICATIONS				
RS232	*	*	*	*
RS485	*	*	*	*
Modbus IP	*	*	*	*
Modbus	*	*	*	*
CCLAN	*	X	*	*
Software for PC	*	*	*	*
Analogic modem	*	*	*	*
GSM/GPRS modem	*	*	*	*
Remote screen	*	X	*	*
Telesignal	*(8+4)		*(8+4)	*(8+4)
J1939	*	X	*	*
 FEATURES				
Alarms history	(10) / (+100)	-10	(10) / (+100)	(10) / (+100)
External start	*	*	*	*
Start inhibition	*	*	*	*
Mains failure start	*(CEC7)	*	*	*
Start under normative EJP	*	X	*	*
Genset contactor activation	*	X	X	*
Main & Genset contactor activation	X	*	*	*
Fuel transfer control	*	X	*	*
Engine temperature control	*	X	*	*
Manual override	*	X	*	*
Programmable alarms	*	X	*	*
Genset start function in test mode	*	X	*	*
Programmable outputs	*	X	*	*
Multilingual	*	*	*	*
SPECIAL FUNCTIONS				
Positioning GPS	*		*	*
Synchronization with mains	*		*	*
Mains Synchronism	*		*	*
Second Zero suppression	*		*	*
RAM 7	*		*	*
Remote screen	*		*	*
Timer	*		*	*

- Standard
- x Not included
- Optional

CEC7: available when the controller CEC7 is incorporated to the installation

MPS 5.0: available application when the module MPS 5. has been incorporated to the panel.

Note: AS5 + CC2 configuration, will have all CEM7 functionality plus CEC7 mains readings.





HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Generating Sets Standard and Optional Features

Engine

- Diesel engine
- 4 strokes-cycle
- Water-cooled
- 12V Electrical system
- Radiator with blowing fan
- water separator decanting filter (no visible level)
- Electronic governor
- Sender WT
- Senders OP
- Low water level sensor
- Dry air cleaner
- Hot components and radiator guards
- Mobile components guards

Alternator

- Self-excited and Self-regulated
- 4 poles
- AVR governor
- IP23 protection degree
- Insulation H class
- Single drive-shaft
- Flexible disc coupling

Electrical system

- Control and power electric panel, with measurements devices and controller (according to necessity and configuration)
- 4 poles circuit breaker
- Battery disconnecter
- Earth leakage protection adjustable (time & sensibility) standard in M5 and AS5 configuration with MCCB
- Battery charger (standard on automatic control panels)
- Pre-heating resistance (standard on automatic control panels) / water jacket heater
- Battery charge alternator with ground connection
- Starting battery/ies installed and connected to the engine (supports included)
- Ground connection electrical installation with connection ready for ground pike (not supplied)





HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Generating Sets Standard and Optional Features

Soundproofed version

- Steel made chassis
 - Oil sump extraction kit
 - Antivibration shock absorber
 - Fuel tank
 - Fuel level sensor
 - Emergency stop button
 - Sound attenuated canopy made of high quality steel metal.
 - High mechanical strenght
 - Low noise level
 - Attenuation through high density roock wool material
 - Powder coating
 - Easy acces for service mainteance
 - Reinforced lifting eye to lift by crane
 - Bunded chassis (works as liquids retention tray)
 - Drain fuel tank cap
 - Drain chassis cap
 - Chasis ready for future mobile kit installation
 - Steel made residential silencer -35db(A) attenuation.
- Optional :
- 3 way valve fuel filling (available in 1/2" and 3/8" fittings)
 - Fuel transfer pump





HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Application Data

Exhaust System

Maximum exhaust temperature	°C	550
Exhaust Gas Flow	Kg/s	0,262
Maximum allowed back pressure	kPa	6
Exhaust Flange Size (external diameter)	mm	120
Heat evacuated through exhaust pipe	KCal/Kwh	614

Air Inlet System

Intake Air Flow 100% Stand By	m3/h	754
Cooling Air Flow 100% Stand By	m3/s	3,8
Alternator fan air flow	m3/s	0,514

Starting System

Starting Motor	Kw	3
Starting Motor	CV	4,08
Recommended Battery Capacity	Ah	185
Auxiliary Voltage	Vcc	12

Fuel System

Fuel Oil Specifications		Diesel
Fuel Tank	L	450
Other Fuel tank capacity	L	600, 1.100



HIMOINSA®
THE ENERGY


Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Dimensions

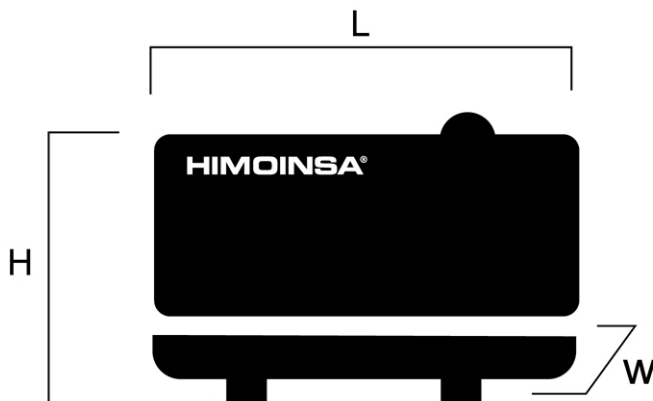

E10

Weight and Dimensions

(L) Length	mm	3.300
(H) Height	mm	1.958
(W) Width	mm	1.200
Shipping Volume seaworthy (standard supplier)	m3	7,75
(*) Wet weight	Kg	2.517
Fuel tank capacity	L.	450
Autonomy	Hours	13
Sound Level	db(A)@7m	72

(*) (with standard accessories)

STANDARD VERSION (Plastic tank)

Himoinsa reserves the right to modify any characteristic without prior notice.

Weights and dimensions based on products standar. Illustrations may include optional equipment.

Technical data described here correspond with the available information at the moment of printing.

Industrial design under patent.

Local Distributor





HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

Another measures/dimensions of available versions

Weight and Dimensions		
(L) Length	mm	3.300
(H) Height	mm	1.958
(W) Width	mm	1.200
Shipping Volume seaworthy (standard supplier)	m3	7,75
(*) Wet weight	Kg	2.634
Fuel tank capacity	L.	600
Autonomy	Hours	17
Sound Level	db(A)@7m	72

(*) (with standard accessories)

HIGH CAPACITY VERSION (Steel tank)

Weight and Dimensions		
(L) Length	mm	3.300
(H) Height	mm	2.171
(W) Width	mm	1.200
Shipping Volume seaworthy (standard supplier)	m3	8,6
(*) Wet weight	Kg	2.737
Fuel tank capacity	L.	1100
Autonomy	Hours	31
Sound Level	db(A)@7m	72

(*) (with standard accessories)

HIGH CAPACITY VERSION (Steel tank)





HIMOINSA®
THE ENERGY

CONTROL PANEL MODEL

M5

Digital manual auto-start control panel and thermal magnetic protection (according to voltage and phase) and differential relay. CEM7




AS5

Automatic control panel WITHOUT ATS (Automatic Transfer Switch) and WITHOUT mains control. (*) As optional AS5 with CEA7. Automatic control panel without ATS (automatic transfer switch) and with mains control. CEM7



CC2

Himoinsa External ATS WITH visualization display. CEC7

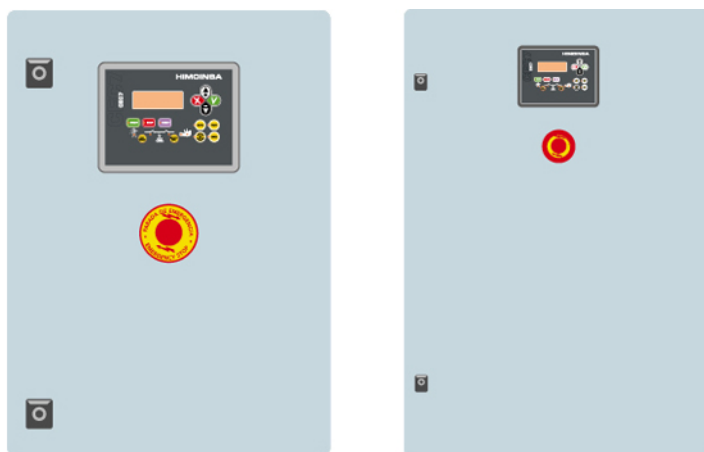

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO



HIMOINSA®
THE ENERGY

CONTROL PANEL MODEL

AS5 + CC2


Automatic with mains control and ATS with visualization. The visualization will be in the genset and in the ATS box. CEM7+CEC7

Model: **HFW-200 T5**

INDUSTRIAL RANGE


Soundproof

Powered by FPT_IVECO

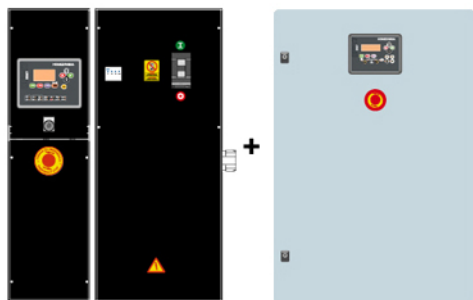

AC5

Automatic Mains Failure control panel. Wall mounted Automatic control panel including transfer switch with thermal magnetic protection (according to voltage and phase). CEA7

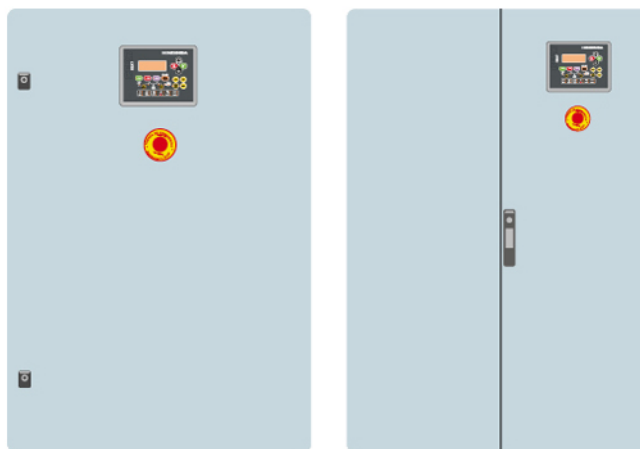



HIMOINSA®
THE ENERGY

Model: **HFW-200 T5**

INDUSTRIAL RANGE

Soundproof

Powered by FPT_IVECO

PDF Summary

Created : 09/04/2012 12:07

Author : Himoinsa

Number of pages : 15

Report Type: Data Sheet - **Industrial range**

Generated by: HIMOINSA Engineering Dept.

Page 1. Genset data

Page 2. Engine Specifications

Page 3. Generator Specifications

Page 4. Control Panels models + General Description

Page 5. Control box and power, CE7 Panel, Alarms

Page 6. Controller features (I)

Page 7. Controller features (II)

Page 8. Generator Features & Options

Page 9. Generator Features & Options

Page 10. Installation Data

Page 11. Dimensions

Page 12. Another measures/dimensions of available versions

Page 13. Control Panel Model

Page 14. Control Panel Model

Page 15. PDF Summary (ID454E343937363231)

<http://www.himoinsa.com/ProductDetail/ficha.aspx?id=49>

